

## Specification Status: Released

### Electrical Rating


**Voltage: 72V MAX**  
**Current: 40A MAX**

Insulating Material:  
Cured, Flame Retardant Epoxy Polymer  
meets UL94 V-0 Requirements

Lead Material:  
24 AWG Tin Plated Copper

Marking:

- 72 — Manufacturer's Mark and Voltage
- XF075 — Part Identification
- Lot Identification (can be on back)

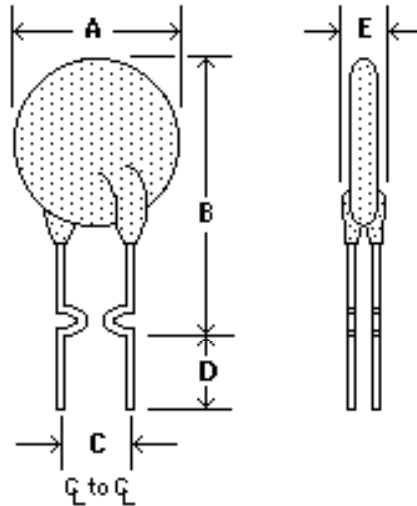

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	10.2	--	15.2	4.3	5.8	7.6	--	--	3.0
in*:	--	(0.40)	--	(0.60)	(0.17)	(0.23)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS :**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED-STATE POWER DISSIPATION
AMPERES AT 20°C HOLD	AMPERES AT 20°C		OHMS AT 20°C		SECONDS AT 20°C, 3.75A MAX	OHMS AT 20°C MAX	WATTS AT 20°C NOMINAL
	HOLD	TRIP	MIN	MAX			
0.75	0.75	1.50	0.25	0.40	6.3	0.60	0.92

Agency Recognitions: UL, CSA and TUV  
Reference Documents: PS300  
Precedence: This specification takes precedence over documents referenced herein.  
Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

### Materials Information

ROHS Compliant

ELV Compliant

Pb-Free

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant

